


U-Reel

Single Hose, General Purpose Reels
with Increased Flexibility and Value

Unique Modular
Design... You always get
a reel that exactly fits
your needs.

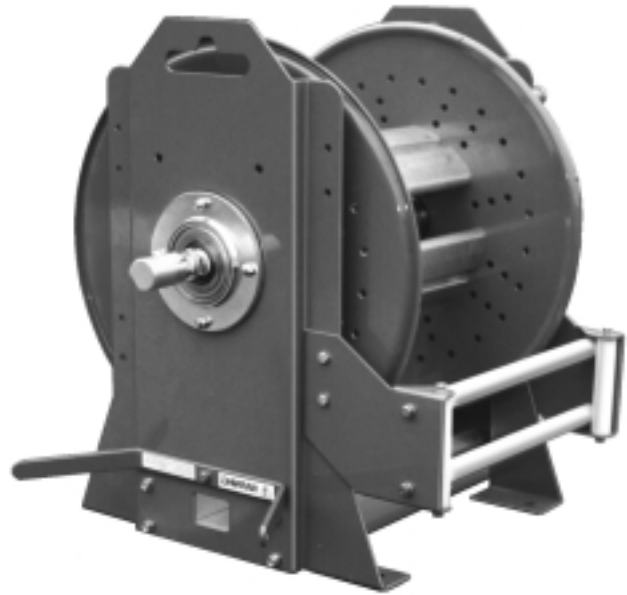

Air Hose Reels

Lift Capacities based on speed of 150 ft/min. and acceleration of 0.50 ft/sec².

NOTE: Consult factory for capacities greater than 120 feet.


FEET OF HOSE	HOSE I.D.					
	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"
20	UH18351-06-1406-2	UH18351-08-1206-4	UH18751-12-1008-1	UH21751-16-1208-1	UH241001-20-1410-1	UH28752-24-1610-3
30	UH18351-06-1406-2	UH18351-08-1206-4	UH18751-12-1008-1	UH21751-16-1208-1	UH241001-20-1410-1	UH28752-24-1610-3
40	UH18351-06-1406-2	UH18351-08-1006-2	UH21751-12-1008-1	UH24751-16-1208-1	UH241001-20-1410-1	UH28752-24-1610-3
50	UH18351-06-1406-2	UH18621-08-1006-1	UH21801-12-1008-1	UH24751-16-1208-1	UH281001-20-1410-4	UH321002-24-1610-1
60	UH18621-06-1406-1	UH21801-08-1406-1	UH21801-12-1008-1	UH241001-16-1208-1	UH281002-20-1410-1	UH321002-24-1610-1
70	UH18621-06-1206-1	UH21801-08-1406-1	UH24801-12-1008-1	UH28802-16-1208-2	UH281002-20-1410-1	UH321002-24-1610-1
80	UH18621-06-1206-1	UH21801-08-1206-1	UH24801-12-1008-1	UH28802-16-1208-2	consult factory	UH321002-24-1610-1
90	UH18621-06-1006-1	UH24801-08-1406-1	UH28802-12-1008-A-5	UH28802-16-1208-2	consult factory	consult factory
100	UH24801-06-1806-1	UH24801-08-1406-1	UH28802-12-1008-A-5	UH321002-16-1208-A-1	consult factory	consult factory

Stretch Capacities based on 10% sag, speed of 150 ft/min. and acceleration of 0.75 ft/sec².

FEET OF HOSE	HOSE I.D.					
	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"
20	UH18351-06-1406-2	UH18351-08-1206-3	UH18751-12-1008-1	UH21751-16-1208-1	UH24751-20-1410-4	UH281001-24-1610-1
30	UH18351-06-1406-2	UH18351-08-1206-3	UH18751-12-1008-1	UH21751-16-1208-1	UH24751-20-1410-4	UH281001-24-1610-1
40	UH18351-06-1406-2	UH18351-08-1006-2	UH21751-12-1008-1	UH24751-16-1208-1	UH24751-20-1410-4	UH281001-24-1610-1
50	UH18351-06-1406-2	UH18621-08-1006-1	UH21801-12-1008-1	UH24751-16-1208-1	UH281001-20-1410-1	UH321001-24-1610-5
60	UH18621-06-1406-1	UH21801-08-1406-1	UH21801-12-1008-1	UH241001-16-1208-1	UH281001-20-1410-1	UH32752-24-1610-2
70	UH18621-06-1206-1	UH21801-08-1406-1	UH24801-12-1008-1	UH28802-16-1208-1	UH281001-20-1410-1	UH321002-24-1610-1
80	UH18621-06-1206-1	UH21801-08-1206-1	UH24801-12-1008-1	UH28802-16-1208-1	UH321002-20-1410-A-3	UH321002-24-1610-1
90	UH18621-06-1006-1	UH24801-08-1406-1	UH28802-12-1008-A-2	UH28802-16-1208-1	UH321002-20-1410-A-3	consult factory
100	UH24801-06-1806-1	UH24801-08-1406-1	UH28802-12-1008-A-2	UH32802-16-1208-1	consult factory	consult factory

Retrieve Capacities based on 3 ft. mounting height, speed of 150 ft/min. and acceleration of 1.0 ft/sec².

FEET OF HOSE	HOSE I.D.					
	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"
20	UH18351-06-1406-3	UH18351-08-1206-4	UH18351-12-1008-5	UH21751-16-1208-1	UH24751-20-1410-2	UH28751-24-1610-2
30	UH18351-06-1406-3	UH18351-08-1206-4	UH18351-12-1008-5	UH21751-16-1208-1	UH24751-20-1410-2	UH28751-24-1610-2
40	UH18351-06-1406-3	UH18621-08-1006-2	UH21751-12-1008-1	UH24751-16-1208-1	UH24751-20-1410-2	UH28751-24-1610-2
50	UH18351-06-1406-3	UH18621-08-1006-2	UH21621-12-1008-3	UH24751-16-1208-1	UH28751-20-1410-2	UH32751-24-1610-3
60	UH18621-06-1406-2	UH21621-08-1406-2	UH21621-12-1008-3	UH24801-16-1208-2	UH28801-20-1410-4	UH321001-24-1610-2
70	UH18621-06-1206-2	UH21621-08-1406-2	UH24621-12-1008-5	UH28801-16-1208-3	UH28801-20-1410-4	UH321001-24-1610-2
80	UH18621-06-1206-2	UH21621-08-1206-2	UH24621-12-1008-5	UH28801-16-1208-3	UH32802-20-1410-2	UH32802-24-1610-3
90	UH21621-06-1406-2	UH21621-08-1206-2	UH28622-12-1008-2	UH28801-16-1208-3	UH32802-20-1410-2	consult factory
100	UH21621-06-1206-2	UH21621-08-1006-2	UH28622-12-1008-2	UH32622-16-1208-4	UH32802-20-1410-2	consult factory

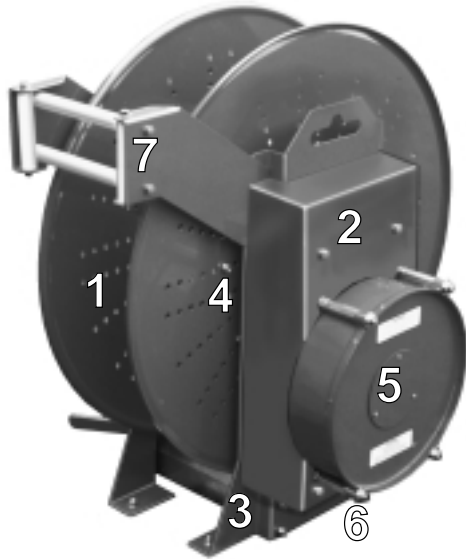

Standard Features

- 300 PSI standard rating (ratings to 10,000 PSI available)
- 1. Wide or Narrow spool
- 2. Direct or Chain Drive.
- 3. Rugged U-shaped frame
- 4. Dual supported spool on over-sized bearings. Not cantilevered.
- 5. Safetychange® Spring Motor makes replacement safe and easy.
- 6. Optional 340° Pivot Base (not shown).
- 7. Optional Roller Guide accommodates a variety of mounting configurations.
- Ratchet Lock

Liquid Hose Reels

Lift Capacities based on speed of 150 ft/min. and acceleration of 0.50 ft/sec².

NOTE: Consult factory for capacities greater than 120 feet.

FEET OF HOSE	HOSE I.D.					
	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"
20	UH18351-06-1406-5	UH18351-08-1006-5	UH18751-12-1008-1	UH21751-16-1208-5	UH24752-20-1410-5	UH281002-24-1610-7
30	UH18351-06-1406-5	UH18351-08-1006-5	UH18751-12-1008-1	UH21751-16-1208-5	UH24752-20-1410-5	UH281002-24-1610-7
40	UH18351-06-1406-5	UH18801-08-1006-1	UH21751-12-1008-1	UH241001-16-1208-2	UH241002-20-1410-1	UH281002-24-1610-7
50	UH18621-06-1006-1	UH18801-08-1006-1	UH21802-12-1008-1	UH241001-16-1208-2	UH281002-20-1410-2	consult factory
60	UH18621-06-1006-1	UH21801-08-1406-1	UH21801-12-1008-1	UH241002-16-1208-1	UH281002-20-1410-2	consult factory
70	UH18621-06-1006-1	UH21801-08-1406-1	UH24802-12-1008-1	UH281002-16-1208-A-4	consult factory	consult factory
80	UH18621-06-1006-1	UH21801-08-1206-1	UH24802-12-1008-1	consult factory	consult factory	consult factory
90	UH18621-06-1006-1	UH24801-08-1406-3	UH281002-12-1008-B-2	consult factory	consult factory	consult factory
100	UH24801-06-1806-1	UH21622-08-1006-1	UH281002-12-1008-B-2	consult factory	consult factory	consult factory

Stretch Capacities based on 10% sag, speed of 150 ft/min. and acceleration of 0.75 ft/sec².

FEET OF HOSE	HOSE I.D.					
	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"
20	UH18351-06-1406-5	UH18351-08-1006-3	UH18751-12-1008-1	UH21751-16-1208-1	UH241001-20-1410-4	UH281002-24-1610-1
30	UH18351-06-1406-5	UH18351-08-1006-3	UH18751-12-1008-1	UH21751-16-1208-1	UH241001-20-1410-4	UH281002-24-1610-1
40	UH18351-06-1406-5	UH18351-08-1006-3	UH21751-12-1008-1	UH24751-16-1208-3	UH241001-20-1410-4	UH281002-24-1610-1
50	UH18621-06-1006-2	UH18801-08-1006-1	UH21801-12-1008-3	UH241001-16-1208-1	UH281002-20-1410-1	UH321002-24-1610-4
60	UH18621-06-1006-2	UH21801-08-1406-1	UH21801-12-1008-3	UH241001-16-1208-1	UH281002-20-1410-1	UH321002-24-1610-4
70	UH18621-06-1006-2	UH21801-08-1406-1	UH24802-12-1008-1	UH28802-16-1208-6	UH281002-20-1410-1	consult factory
80	UH18621-06-1006-2	UH21801-08-1206-1	UH24802-12-1008-1	UH281002-16-1208-A-1	consult factory	consult factory
90	UH21801-06-1406-1	UH24801-08-1406-2	UH281002-12-1008-B-1	UH281002-16-1208-A-1	consult factory	consult factory
100	UH24801-06-1806-2	UH21622-08-1006-1	UH281002-12-1008-B-1	consult factory	consult factory	consult factory

Retrieve Capacities based on 3 ft. mounting height, speed of 150 ft/min. and acceleration of 1.0 ft/sec².

FEET OF HOSE	HOSE I.D.					
	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"
20	UH18351-06-1406-3	UH18351-08-1206-4	UH18351-12-1008-6	UH21751-16-1208-2	UH24751-20-1410-3	UH28751-24-1610-5
30	UH18351-06-1406-3	UH18351-08-1206-4	UH18351-12-1008-6	UH21751-16-1208-2	UH24751-20-1410-3	UH28751-24-1610-5
40	UH18351-06-1406-3	UH18621-08-1006-2	UH21751-12-1008-1	UH24751-16-1208-2	UH24751-20-1410-3	UH28751-24-1610-5
50	UH18351-06-1406-3	UH18621-08-1006-2	UH21621-12-1008-5	UH24801-16-1208-3	UH281001-20-1410-2	UH321001-24-1610-2
60	UH18621-06-1406-2	UH21621-08-1406-3	UH21621-12-1008-5	UH24801-16-1208-3	UH281001-20-1410-2	UH321001-24-1610-2
70	UH18621-06-1206-2	UH21621-08-1406-3	UH24801-12-1008-2	UH28801-16-1208-3	UH28802-20-1410-3	UH321001-24-1610-2
80	UH18621-06-1206-2	UH21621-08-1206-3	UH24801-12-1008-2	UH28801-16-1208-3	UH32802-20-1410-3	UH32802-24-1610-4
90	UH21621-06-1406-2	UH21621-08-1206-3	UH28622-12-1008-3	UH28801-16-1208-3	UH32802-20-1410-3	consult factory
100	UH21621-06-1206-2	UH24621-08-1406-3	UH28622-12-1008-3	UH32802-16-1208-2	UH32802-20-1410-3	consult factory